



EXCEPT AS OTHERWISE PROVIDED BY CONTRACT, THIS DRAWING AND SPECIFICATIONS SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF MATTER DEPICTED HEREIN WITHOUT THE EXPRESSED WRITTEN PERMISSION OF THE CLAUDE LAVAL CORPORATION, OR ITS ASSIGNEES.

REVISIONS				
ECN	REV.	DESCRIPTION	DATE	APPROVED


NOTES:

1. INLET & OUTLET FLANGES ARE 16" 150# RF PER ANSI B16.5 REQUIRING 16X Ø1" BOLTS (BOLTS AND GASKETS NOT INCLUDED).
2. MAXIMUM PRESSURE: 150 psi (10.3 bar).
3. MAXIMUM TEMPERATURE: 175°F (79.4°C).
4. PRESSURE LOSS: 3-12 psid (.2-8 bar) AT RATED FLOW.
5. RATED FLOW: 4200-7800 gpm (950-1775 m³/hr).
6. APPROXIMATE DRY WEIGHT: 5628 lbs (2553 kg).
7. FINISH: POWDERCOAT LAKOS BLUE (EXTERIOR ONLY) SCOTCHKOTE 134 (INTERNAL WETTED SURFACES).

THIS DRAWING HAS BEEN GENERATED AND IS MAINTAINED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY AN APPROVED ENGINEERING CHANGE ORDER (ECO). PAPER COPIES ARE UNCONTROLLED.

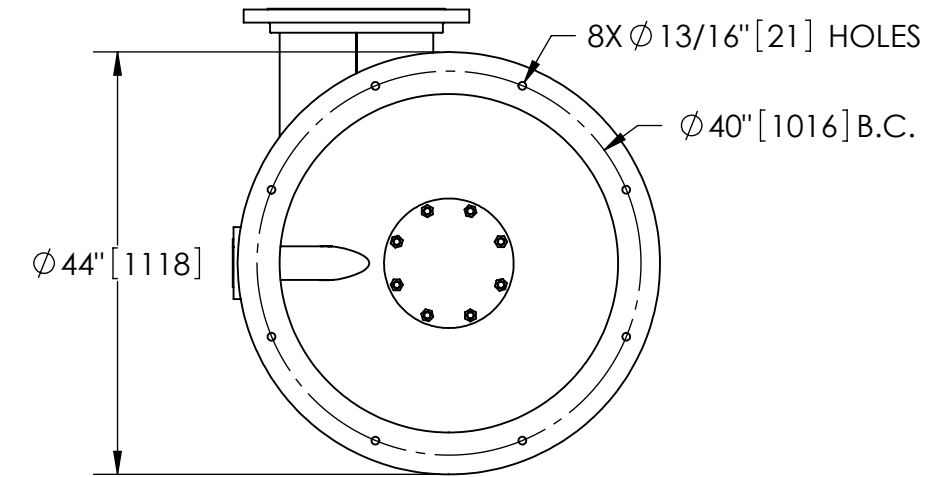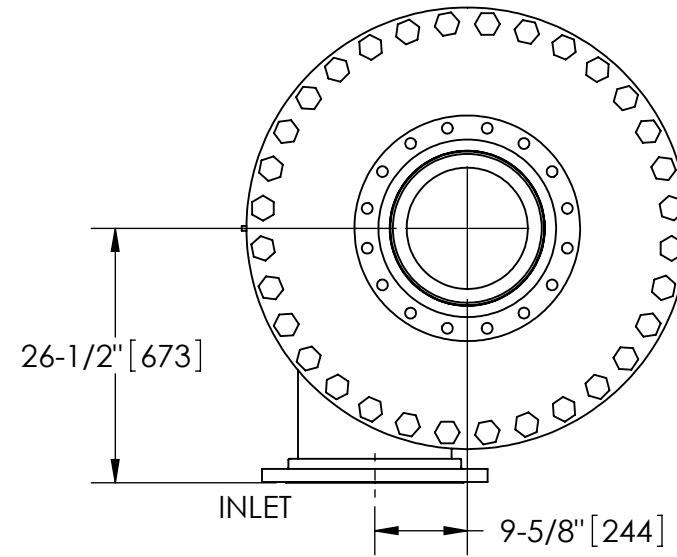

**BOTTOM VIEW**


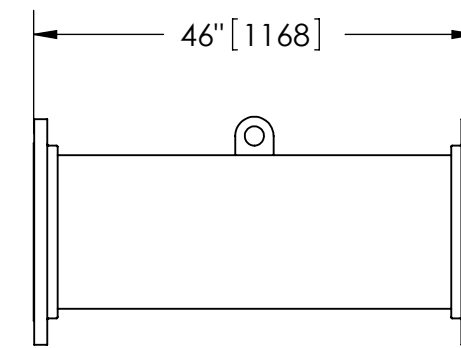


**FLANGED SPOOL**

MODEL FS-T6/SK (AVAILABLE SEPARATELY) REQUIRED FOR REMOVAL OF TOP ASSEMBLY

**SUBMITTAL DRAWING**

This drawing is submitted for spatial consideration only. Do not pre-plumb to these dimensions.

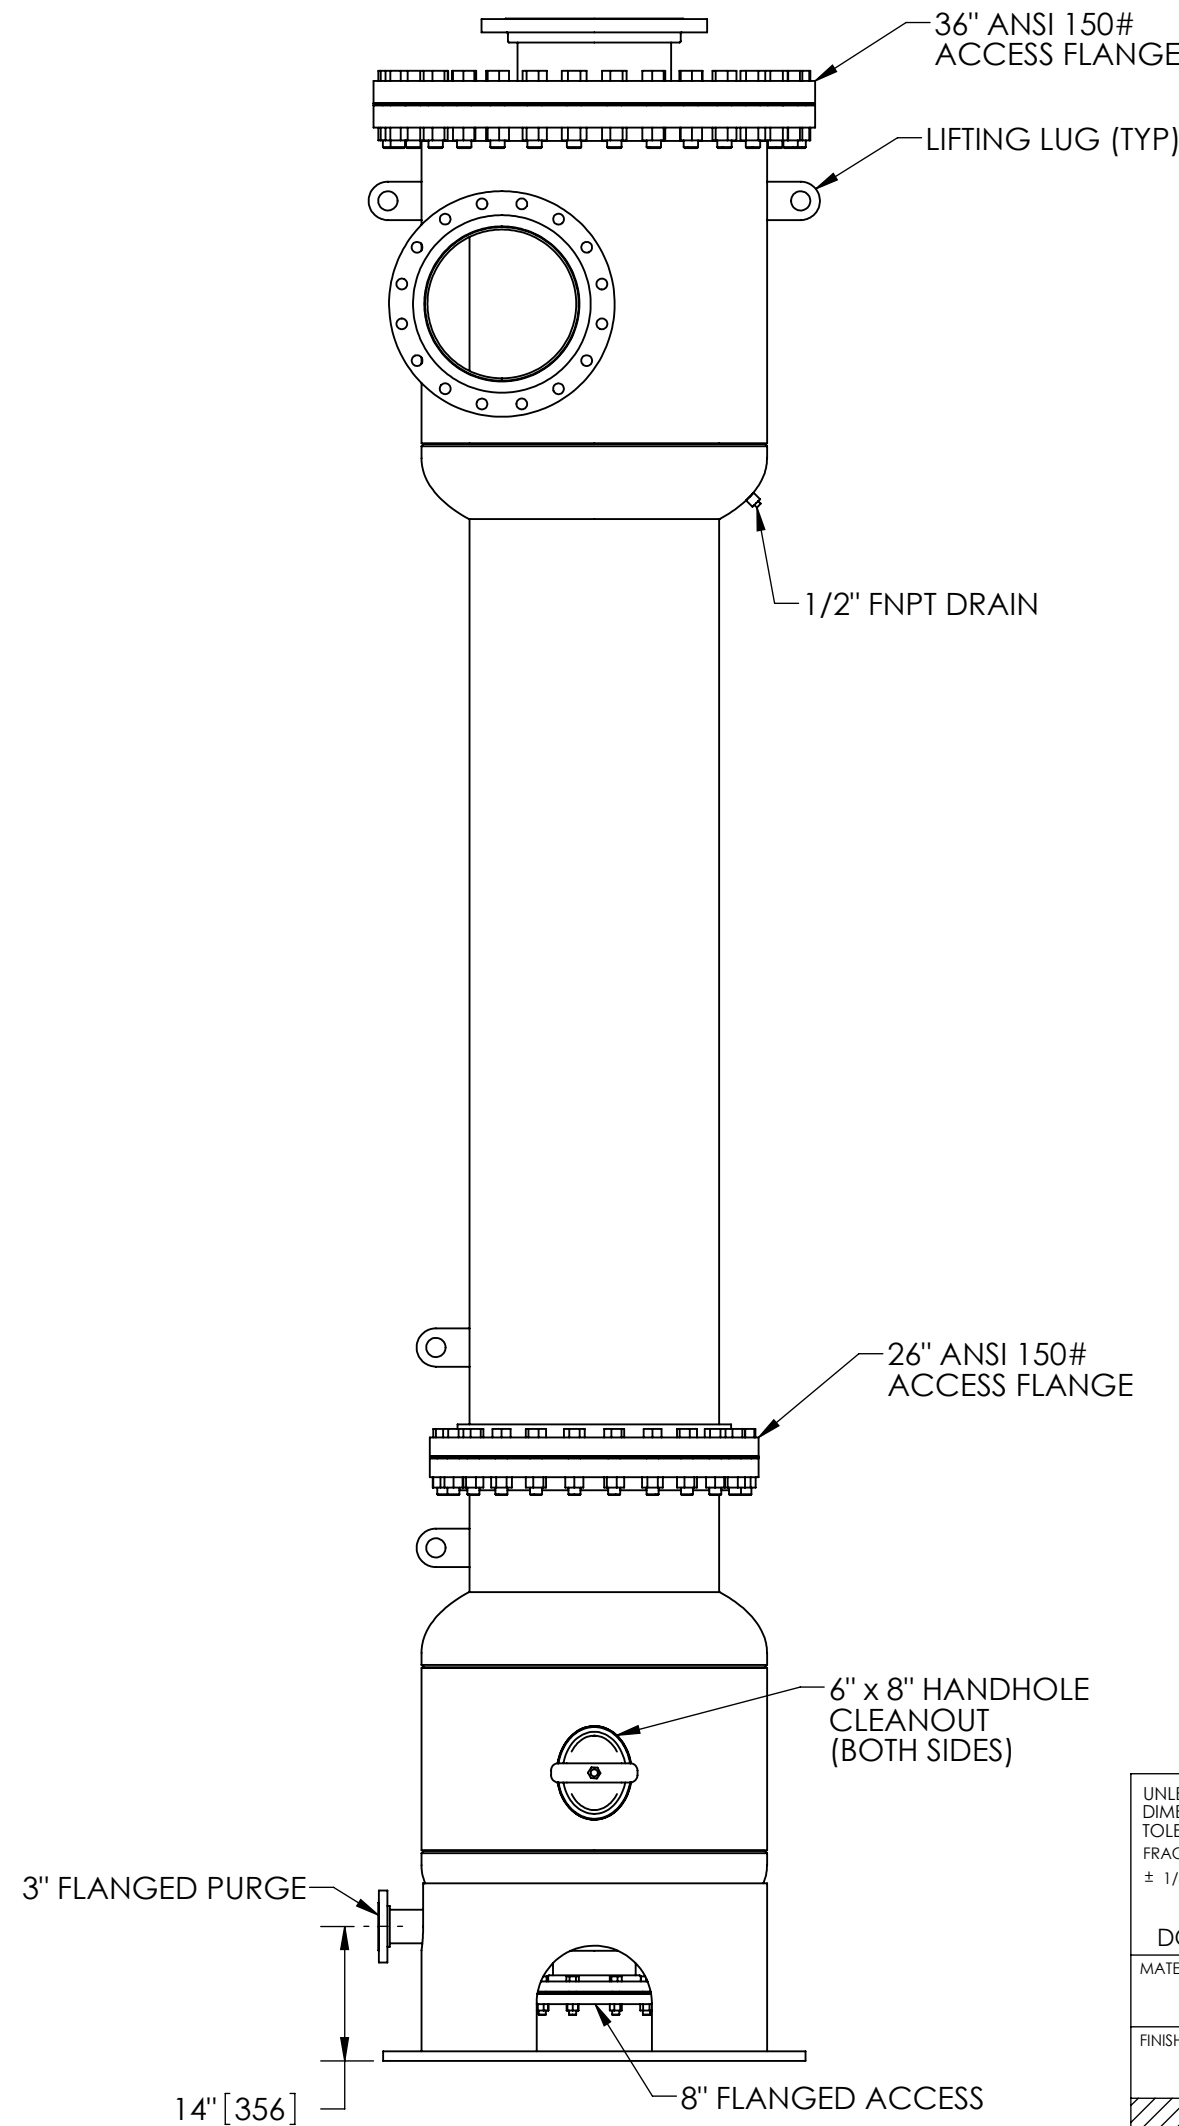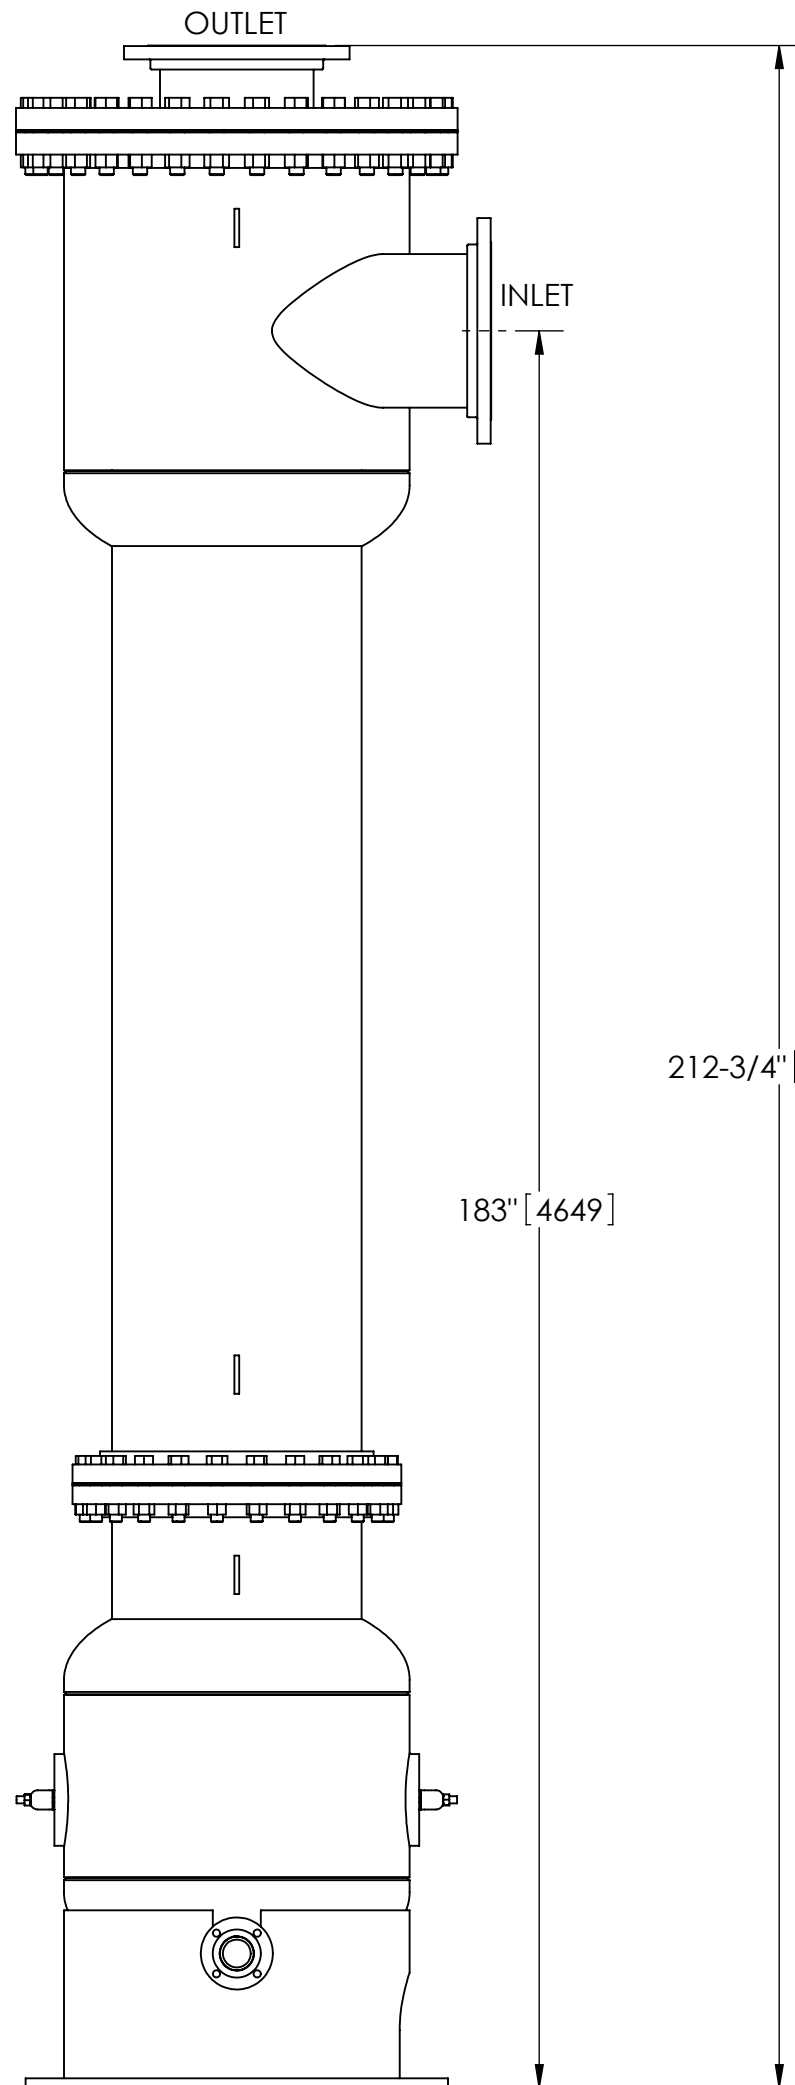

UNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN: INCHES [mm]  
TOLERANCES ARE:

FRACTIONS	DECIMALS	ANGLES
± 1/4"	.XX ± .01	± 1/4°
	.XXX ± .005	
	.XXXX ± .0005	

DO NOT SCALE DRAWING

ENGINEERED FOR:	
STANDARD	
APPROVALS	DATE
DRAWN AMF	5/7/09
ENGR -	-
MFG -	-
WORK ORDER	QTY.

<b>LAKOS</b>		CLAUDE LAVAL CORP. FRESNO, CALIFORNIA 93727 WWW.LAKOS.COM	
TITLE JSK-4200-V, SEPARATOR, 4200-7800 gpm, CARBON STEEL/SCOTCHKOTE			
SIZE C	MODEL NO.	DWG NO. 130407	REV. 01
SCALE 1:20	EST. WT. 5628 lb	SHEET 1 OF 1	

DWG NO. 130407  
SHEET 1 OF 1  
REV. 01