
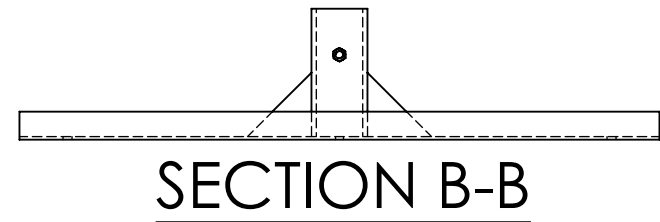


EXCEPT AS OTHERWISE PROVIDED BY CONTRACT, THIS DRAWING AND SPECIFICATIONS SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF MATTER DEPICTED HEREIN WITHOUT THE EXPRESSED WRITTEN PERMISSION OF THE CLAUDE LAVAL CORPORATION, OR ITS ASSIGNEES.


- NOTES:
1. INLET & OUTLET FLANGES ARE 8" 150# RF PER ANSI B16.5 REQUIRING 8X ϕ 3/4" BOLTS (BOLTS AND GASKETS NOT INCLUDED).
 2. MAXIMUM PRESSURE: 150 psi (10.3 bar).
 3. FOR MAXIMUM TEMPERATURE, CONSULT FACTORY.
 4. PRESSURE LOSS: 3-12 psid (.2-.8 bar) AT RATED FLOW.
 5. RATED FLOW: 1160-2150 gpm (265-490 m³/hr).
 6. APPROXIMATE DRY WEIGHT: 1903 lbs (910 kg).
 7. FINISH: POWDERCOAT LAKOS BLUE (EXTERIOR ONLY) SCOTCHKOTE 134 (INTERNAL WETTED SURFACES).

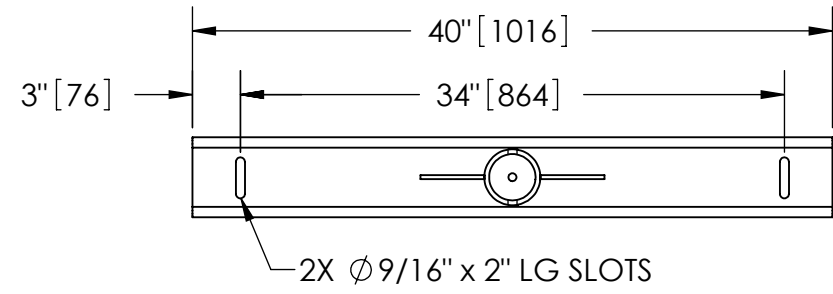


SECTION B-B

REVISION HISTORY				
ZONE	REV	DESCRIPTION	DATE	APPROVED

THIS DRAWING HAS BEEN GENERATED AND IS MAINTAINED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY AN APPROVED ENGINEERING CHANGE ORDER (ECO). PAPER COPIES ARE UNCONTROLLED.

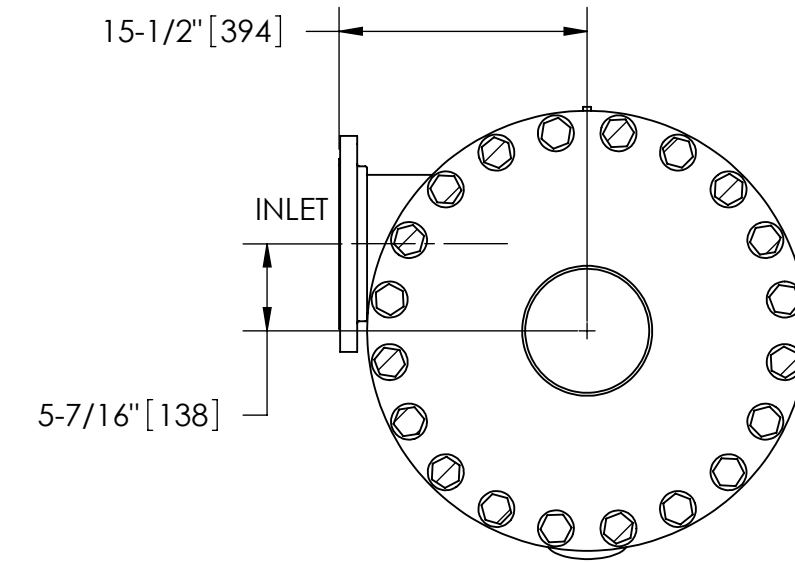


SECTION A-A

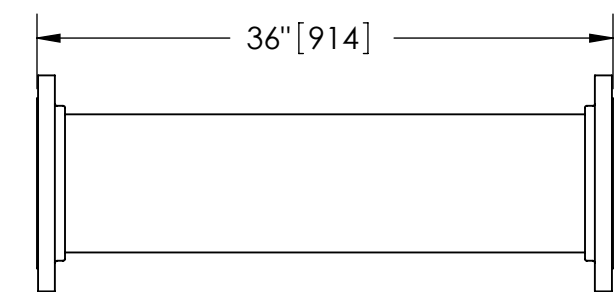

FLANGED SPOOL
MODEL FS-08/SK (AVAILABLE SEPARATELY)
REQUIRED FOR REMOVAL OF TOP ASSEMBLY

SUBMITTAL DRAWING

This drawing is submitted for spatial consideration only. Do not pre-plumb to these dimensions.

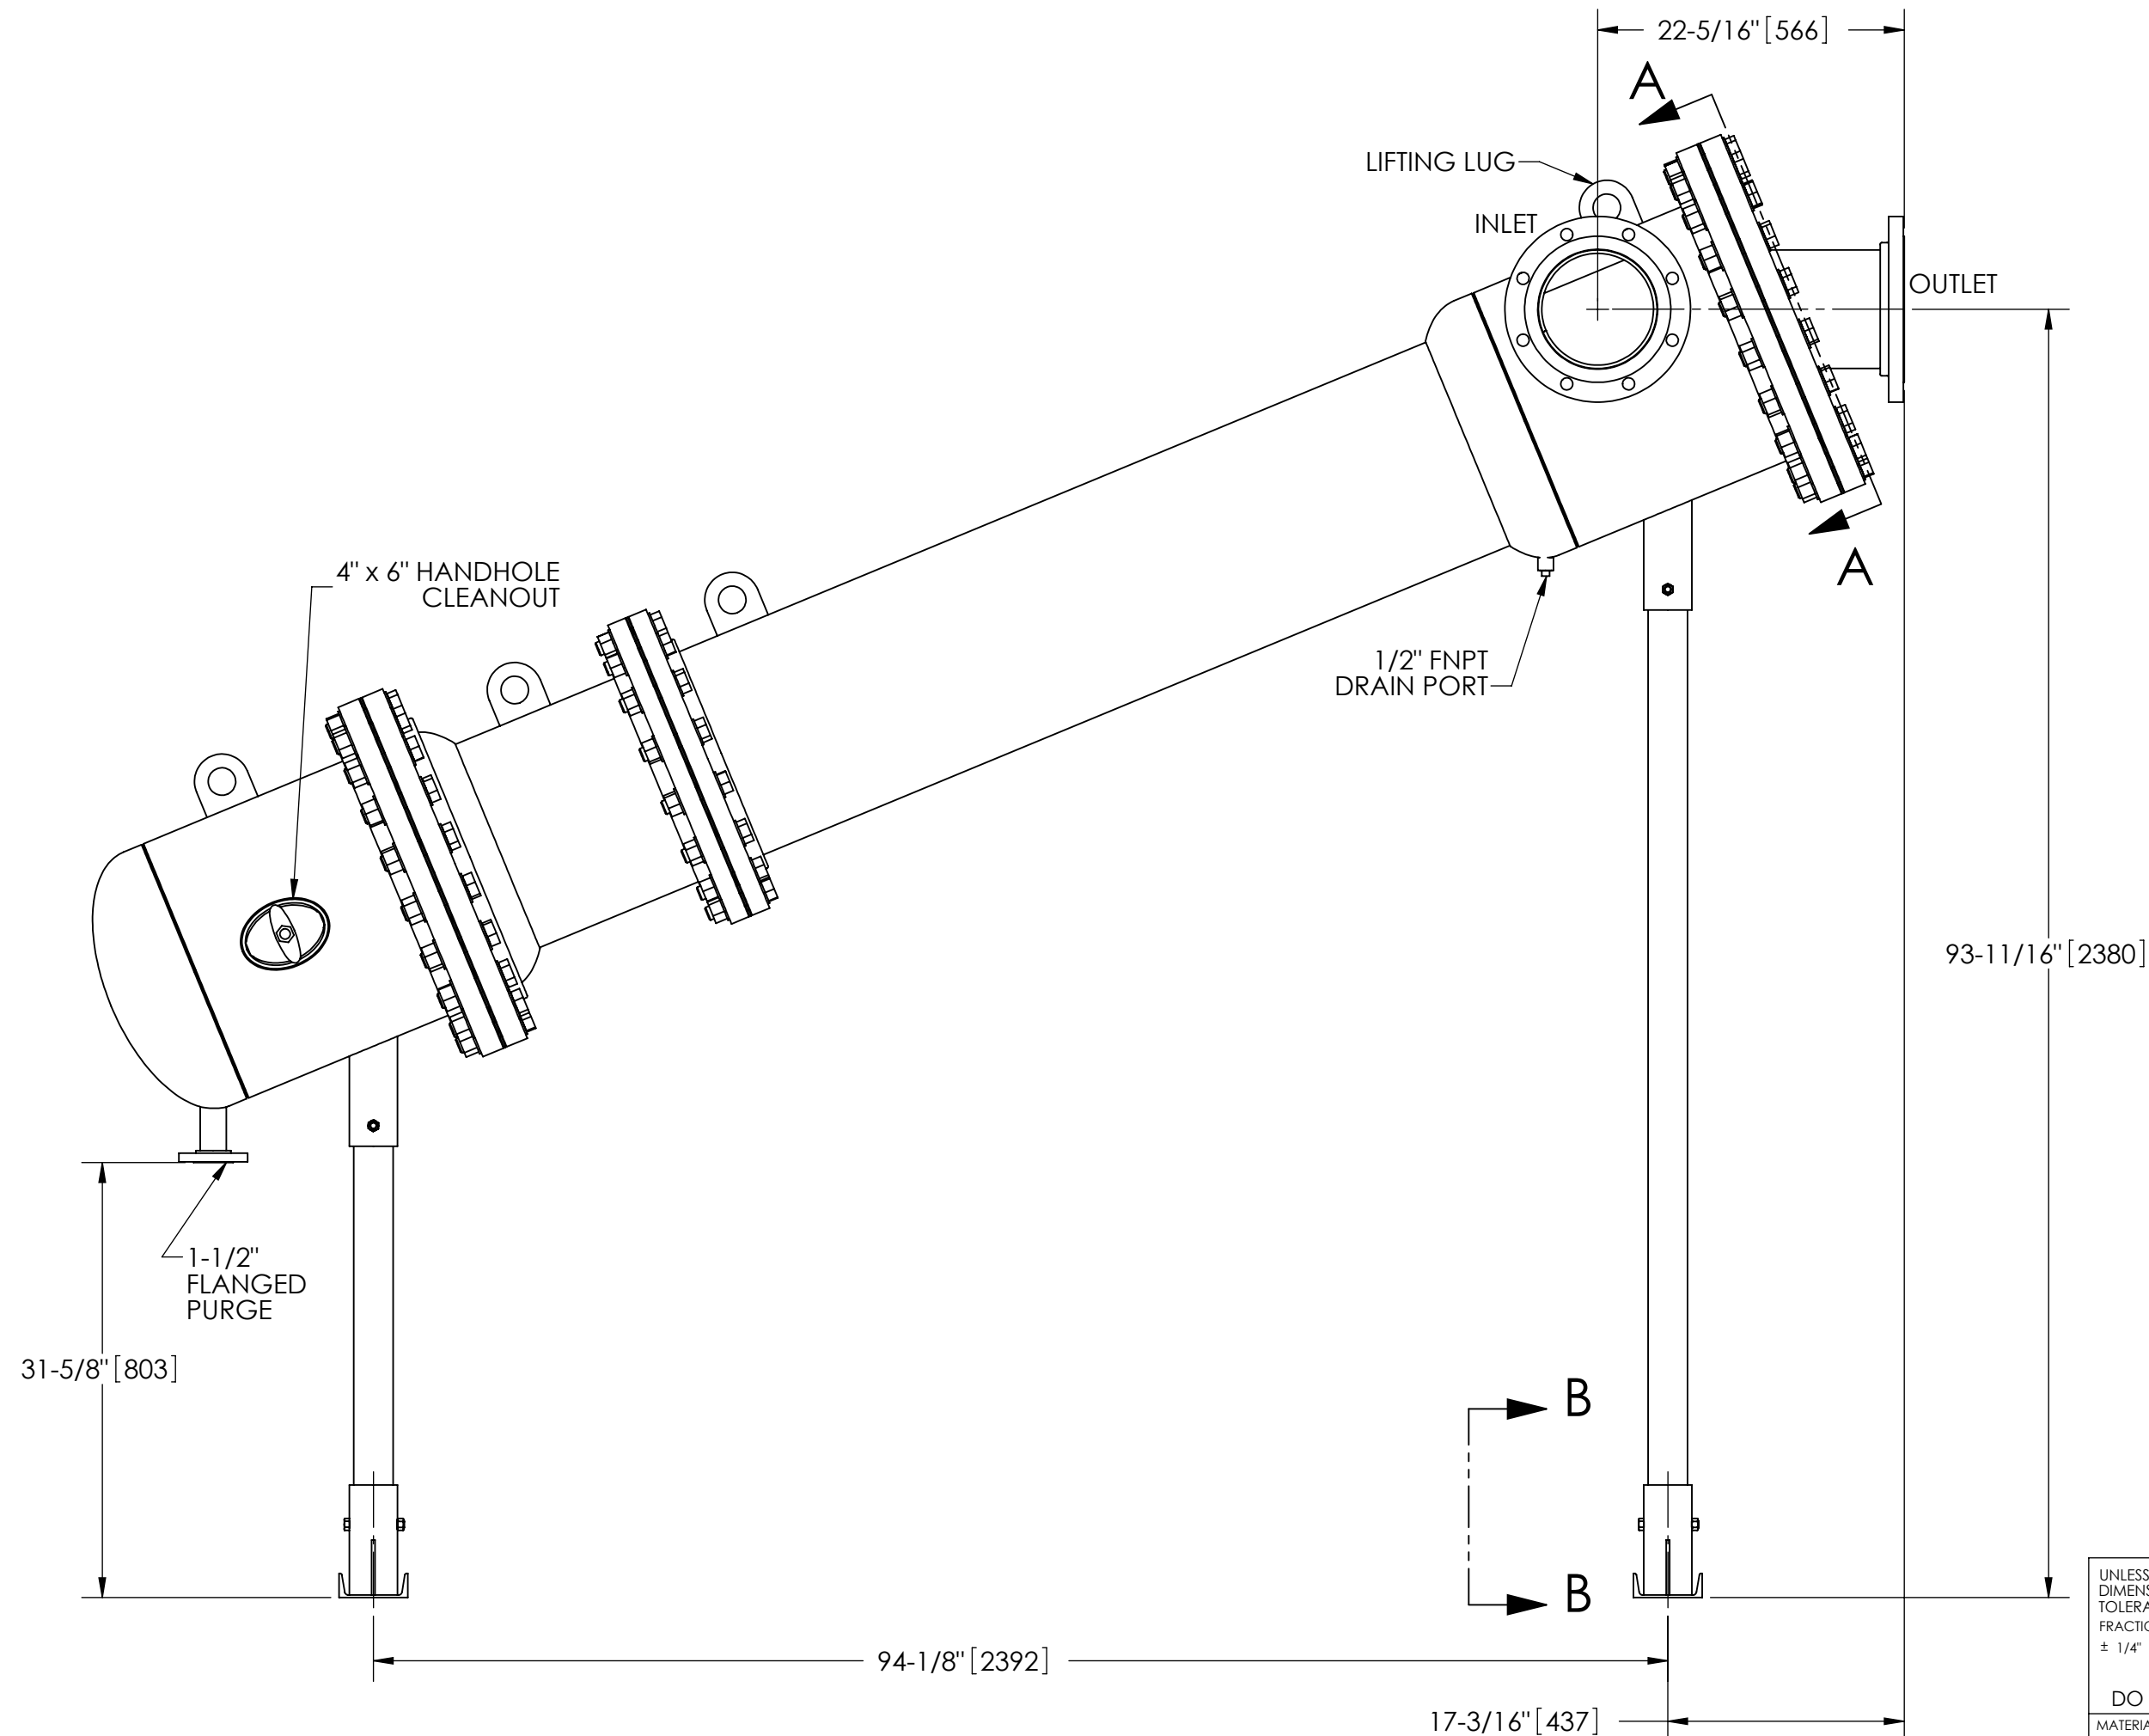

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN: INCHES (mm) TOLERANCES ARE: FRACTIONS DECIMALS ANGLES $\pm 1/4"$.XX $\pm .01$ $\pm 1/4^\circ$.XXX $\pm .005$.XXXX $\pm .0005$		ENGINEERED FOR: STANDARD		CLAUDE LAVAL CORP. FRESNO, CALIFORNIA 93727 WWW.LAKOS.COM	
DO NOT SCALE DRAWING		APPROVALS	DATE	TITLE	
MATERIAL	CLASS P-1 MILD CARBON STEEL	DRAWN	DLW 2/9/07	JSK-1160-L, SEPARATOR, 1160-2150 gpm, CARBON STEEL/SCOTCHKOTE	
FINISH	SEE NOTES	ENGR	DLW 2/9/07	SIZE	MODEL NO.
		MFG	-	C	
		WORK ORDER		SCALE	DWG NO.
				1:12	119257
					REV. 01
				EST. WT. 1903 lb	SHEET 1 OF 1

DWG. NO. 119257
SHEET 1
REV. 01

A